


Replacement of the Contact Point

1

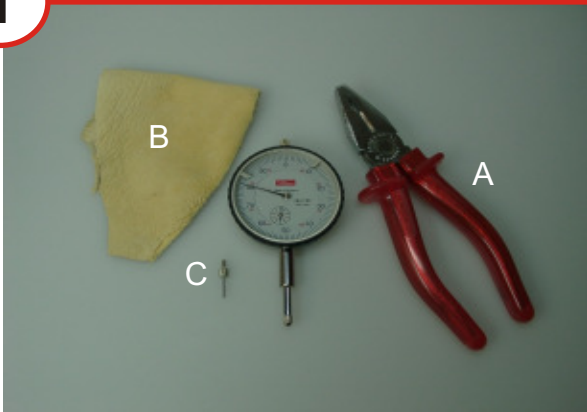

You need the following tools to change a contact point like an expert:

Flat pliers (A) a piece of leather or felt (B), and the contact point.

2



To avoid a damage of the rack, it first has to be pushed to the end position. Keep the rack in this position.

3



While keeping the rack in end position, the contact point is detached by using the leather or felt and the flat pliers by screwing anti-clockwise.

4



After loosening, the contact point may be removed manually out of the rack.

5



The new contact point has to be screwed clockwise into the rack.

6



Now the rack has to be pushed again to the end position.

The contact point now has to be tightened by using the leather or felt and the flat pliers.

7



The contact point now was changed in the right way and without any damage of the rack.

You may use the dial gauge again in an optimal way.