


Replacement of the Feeler

1

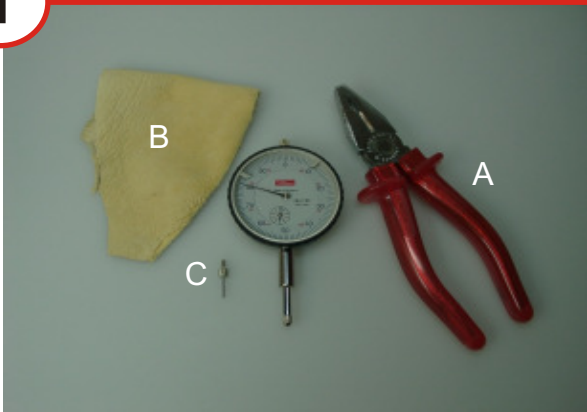

You need the following tools to change a feeler like an expert:
Flat pliers (A) a piece of leather or felt (B), and the new feeler.

2



To avoid a damage of the rack, this rack first has to be pushed to the end position. Keep the rack in this position.

3



While keeping the rack in end position, now the feeler is detached by using the leather or felt and the flat pliers. This detachment is the leather or felt has to be put around the feeler, the flat pliers are used to screw the feeler anti-clockwise.

4



The feeler may be screwed out of the rack by fingers after being detached.

5



A new one feeler now has to be screwed clockwise into the rack.

6



Now the rack has to be pushed again to the end position. The feeler now has to be tightened by using the leather or felt and the flat pliers.

7



The feeler now was changed in the right way and without any damage of the rack, and so you may use the dial gauge again in an optimal way